


Sound Plus® WIR TX900 Infrared System

Description:

The WIR TX900 is a high performance, cost-effective infrared system designed for simultaneous language interpretation of up to four languages. Operating on 2.3-3.8 MHz, the WIR TX900 is less susceptible to traditional radio and lighting interference. When using the optional RX12-4 four-channel receiver, the WIR TX900 will operate up to 22,000 sq. ft, ideal for auditoriums, theaters, or other large venues.

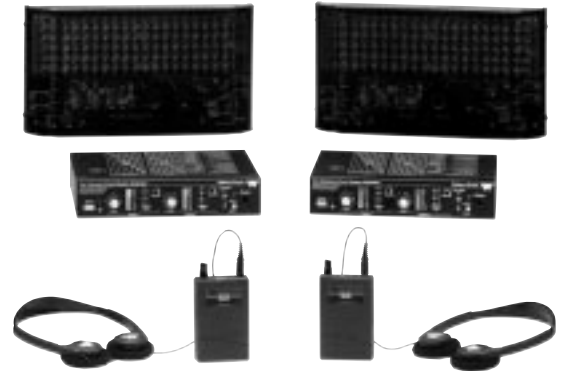

Applications:


- Simultaneous interpretation
- Conferences
- Multi-media rooms
- Boardrooms
- Courtrooms
- Schools
- Universities
- Cinema
- Churches

Models:	WIR TX900	(N. AMERICA)
	WIR TX900-01	(EURO)
	WIR TX900-02	(UK)

MOD 232 Modulator:


Size, Weight:	8.5" W x 8.2" D x 1.7" H (21.5cm x 20.8cm x 4.4cm), 3.1lbs. (1.5kg)
Color:	Black epoxy paint with white legends
Rack Mount:	1/2 rack space wide, 1 rack space high, one or two modulators may be mounted in a single IEC rack space with RPK 005 (single) or RPK 006 (double) Rack Mount Kits
Power Supply:	Wall Transformer, 24VAC, 50-60 Hz, 15VA North America: TFP 016, UL/CSA Europe: TFP 027-01, 2-pin Schuko plug, CE UK: TFP 027-02, 3-pin UK plug, CE
Modulation:	FM Wideband, ±50kHz deviation, 50uS pre-emphasis
Carrier Frequency:	Channel A: Selectable, 2.3/2.8/3.3/3.8MHz, Channel B: Selectable, 2.3/2.8/3.3/3.8MHz
Signal to Noise Ratio:	more than 60dB
Frequency Response:	30 to 16,000Hz, +1 dB, -3dB, electrical response
Total Harmonic Distortion:	Less than 2%, electrical response
Audio Processing:	Compression (slope) adjustable from 1:1 to 4:1 Switchable compression gain: Moderate: 16dB. Max: 33dB
Auto Carrier Shut-Off:	30 minute timer shuts off carrier when no audio is present (can be disabled)

(MOD 232 Front Panel)

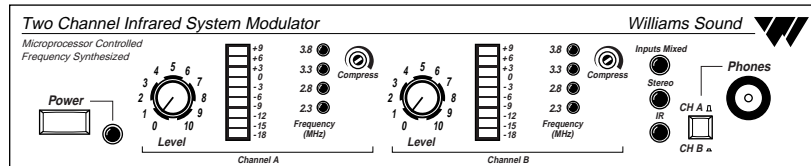

Power Switch:	Two-position push button, ON/OFF
Power Indicator:	Green LED
Audio Level Controls:	CHA and CHB Input Level, rotary knobs
Audio Indicators:	CHA and CHB Audio Level, 10-segment LED's
Carrier LEDs:	4 green LED carrier "on" indicators per channel (indicates frequency, malfunctions)
Compress Control:	1:1 to 4:1
Input Mix LED:	Indicates inputs A and B audio are mixed and transmitted by CHA. CHB off
Stereo LED:	Indicates stereo mode
Phones Switch:	Selects CH1 or CH2 for phones when not in stereo mode
Phones Output:	1/4" TRS headphone jack. Accepts stereo, mono, and any impedance phones.
Infrared Test LED:	IR LED for receiver testing, monitoring, and audio signal testing.

(MOD 232 Rear Panel)

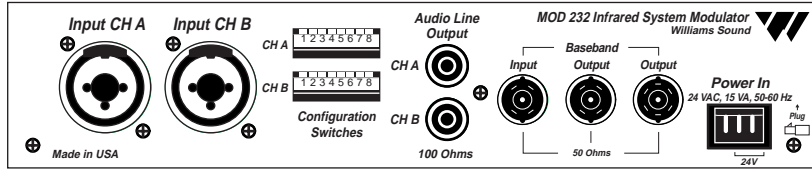


Power Input:	3-Pin Molex, 24VAC, 50-60Hz, 15 VA
Audio Input Jack:	CHA and CHB combination XLR/TRS jack
Mic Level:	Balanced, Lo-Z, 100µV min. to 90 mV max., 1mV nominal, 3kΩ input impedance, supplies switchable simplex power per DIN 45596 for condenser mics
Line Level:	Balanced or unbalanced, 21mV min. to 10V max., 212mV nominal, 100kΩ
Audio Line Output Jacks:	RCA Jack, CHA and CHB, 500mV, unbalanced, 100Ω source impedance, load impedance must be greater than 1kΩ
Configuration Switches:	CHA and CHB 8-position DIP switch, selects Mic/Line input, compressor gain, simplex power, discrete or mixed inputs, carrier frequency, channel disable, auto shut-off timer.
Baseband Input Jack:	BNC, allows mixing with additional MOD 232 Modulator (4CH operation), 100mV, 50Ω input impedance, use with MOD 232 or MOD 112 (111), BNC, RG-58 Cable
Baseband Output Jack:	Two BNC jacks carry baseband signal, 100mV/channel, 50Ω source impedance, for use with WIR TX9 or MOD 232 only
Approvals:	CE, FCC Part 15, Industry Canada, AS
Operating requirements:	0-50° C ambient temperature, non-condensing, non-corrosive atmosphere
Warranty:	5 years on Modulator, 90 days on accessories

WIR TX9 Emitter:

Dimensions, Weight:	11.25" W x 6.25" H x 2.125" D (28.6cm x 15.9cm x 5.4cm), 1.9lbs (0.9kg)
Color:	Black with white legends, red acrylic lens
Power Supply:	Wall Transformer, 24VAC, 50-60Hz, 35VA, 3-pin MOLEX Connector North America: TFP 010, UL/CSA Europe: TFP 027-01, 2-pin Schuko plug, CE UK: TFP 027-02, 3-pin UK plug, CE <i>Note: Each WIR TX9 requires its own power supply</i>
Power Cable:	NEC Class 2 wiring, two-conductor, 18 ga., 200' (61m) max. length
Indicators:	Green LED power indicator, red LED baseband indicator
Carrier Frequency:	50 kHz to 8 MHz
Emitter IR Power:	3.5 watts
Coverage Area:	28,000 sq. ft. (2,600 sq. m) in single-channel mode when using the RX12-4 Receiver 11,000 sq. ft. (1,000 sq. m.) in four-channel mode when using the RX12-4 Receiver (See coverage area diagrams)
Baseband Input:	BNC, 100mV per carrier, 50Ω, for use with WIR TX9 or MOD 232 only
Baseband Output:	BNC, 50Ω, for use with TX9 only
Baseband Cable:	RG 58 Coax, BNC connectors, maximum 1000' (300m) length
Operating Requirements:	0-50° C ambient temperature, non-condensing, non-corrosive atmosphere
Mounting Kits:	Wall or Ceiling Mount: BKT 024 Omnidirectional mount, Mic Stand Kit: SS-11 or SS-6
Warranty:	5 years on Emitter, 90 days on accessories
Approvals:	CE, FCC Part 15, Industry Canada, AS
Compatible Receivers:	WIR RX12-4 Four Channel Receiver, RX14 Stereo Receiver, RX16 Two-channel Receiver

(WIR TX9 Rear Panel)

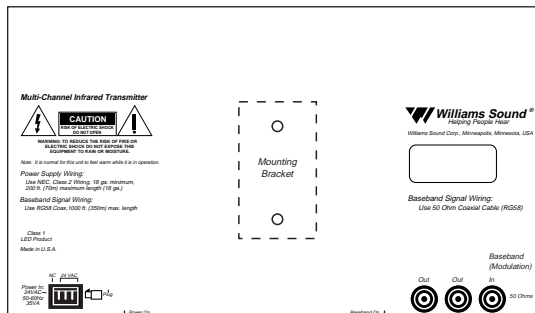







WIR TX9 Coverage Area


Maximum Range when using the RX12-4 Infrared Receiver




HORIZONTAL RADIATION POLAR PATTERNS
DISTANCE FROM EMITTER TO 1 nW / SQ. CM CONTOUR

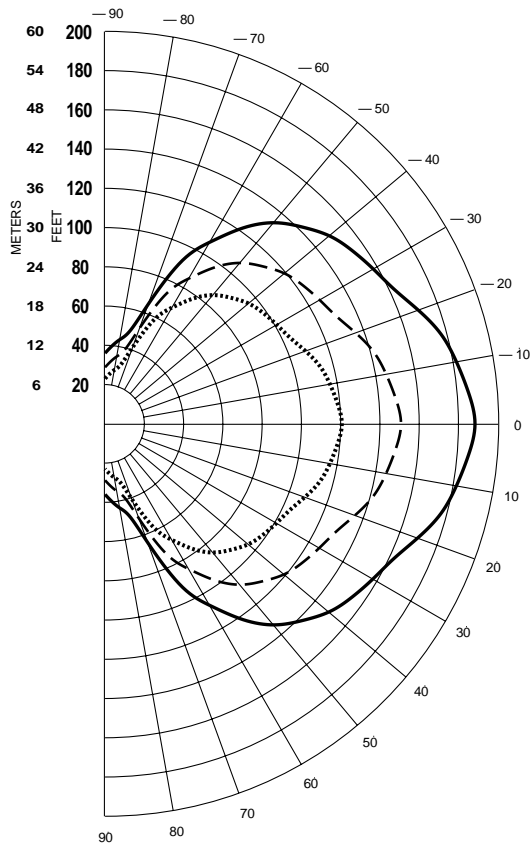

-  1 Channel, 1 nW / sq. cm
(Approx. 28000 sq. feet., 2600 sq. meters)
-  2 Channel, 1 nW / sq. cm per channel
(Approx. 18000 sq. feet., 1700 sq. meters)
-  4 Channel, 1 nW / sq. cm per channel
(Approx. 11000 sq. feet., 1000 sq. meters)

VERTICAL RADIATION POLAR PATTERNS
DISTANCE FROM EMITTER TO 1 nW / SQ. CM CONTOUR

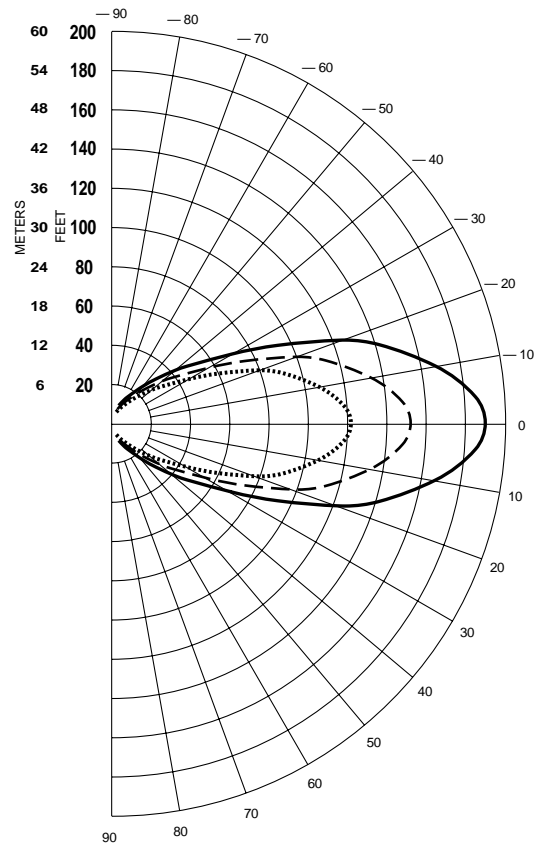


-  1 Channel, 1 nW / sq. cm
-  2 Channels, 1 nW / sq. cm per channel
-  4 Channels, 1 nW / sq. cm per channel


NOTE: Coverage area shown is direct radiation. Reflections of the infrared light from walls, ceilings, and floors will change these patterns.

WIR RX12-4 Receiver

Receiver Style:	Body-Pack, dual-lens detector, lanyard
Size:	3-5/8" L x 2-3/8" W x 7/8" H (9.2 cm x 6 cm x 2.2 cm)
Weight:	4.5oz. (127 g) with batteries
Color and Material:	Gray, shatter-proof polyallomer
Lanyard:	3 ft. (.91 m), allows receiver to be worn around the neck
Operating Temperature:	-10°C to +50°C
Battery Type:	2 x AA, alkaline (BAT 001) or NiMH (BAT 026)
Battery Life:	Alkaline: 60 hours, NiMH: 30 hours/charge
Battery Drain:	25mA, nominal
Charging Contacts:	For use only with CHG 200 and CHG 1600 Chargers
Carrier Frequency:	Channel 1: 2.3MHz, Channel 2: 2.8 MHz Channel 3: 3.3MHz, Channel 4: 3.8MHz
De-Emphasis:	50uS
FM Deviation:	±50 kHz
Signal to Noise Ratio:	60dB min.
Squelch:	Receiver squelches (mutes) at 40dB S/N ratio
Frequency Response:	25 Hz to 16 KHz, +1 dB, -3 dB, electrical response
Total Harmonic Distortion:	Less than 1%, electrical response
Controls:	ON/OFF/VOLUME: combination thumbwheel knob Channel Selector: Four position rotary switch
Indicators:	Red LED "ON" indicator, flashes to indicate Lo battery
Audio Output Jacks:	3.5mm stereo mini phone jack. Accepts 3.5mm mono or stereo phone plug
Audio Output Power:	15mW max at 32Ω
Acoustic Output:	125 dB SSPL90 with HED 002; 110 dB SSPL90 w/ EAR 013
Sensitivity:	Better than 1 nW/cm ² for 40 dB signal to noise ratio
Approvals:	CE, FCC, Industry Canada, AS
Warranty:	5 years on Receiver, 90 days on accessories
Compatible Headphones/Earphones:	Mono or stereo, 8-32 ohms, 3.5 mm mini phone plug, HED 002, HED 021, EAR 013, EAR 014, EAR 022




RX12-4 Top View

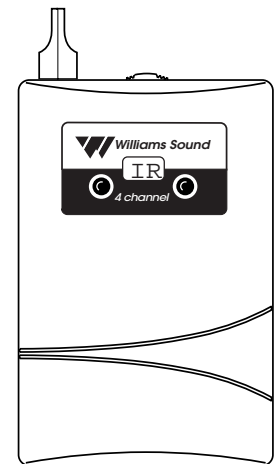

RX12-4 Front View

Four-Channel System Diagram

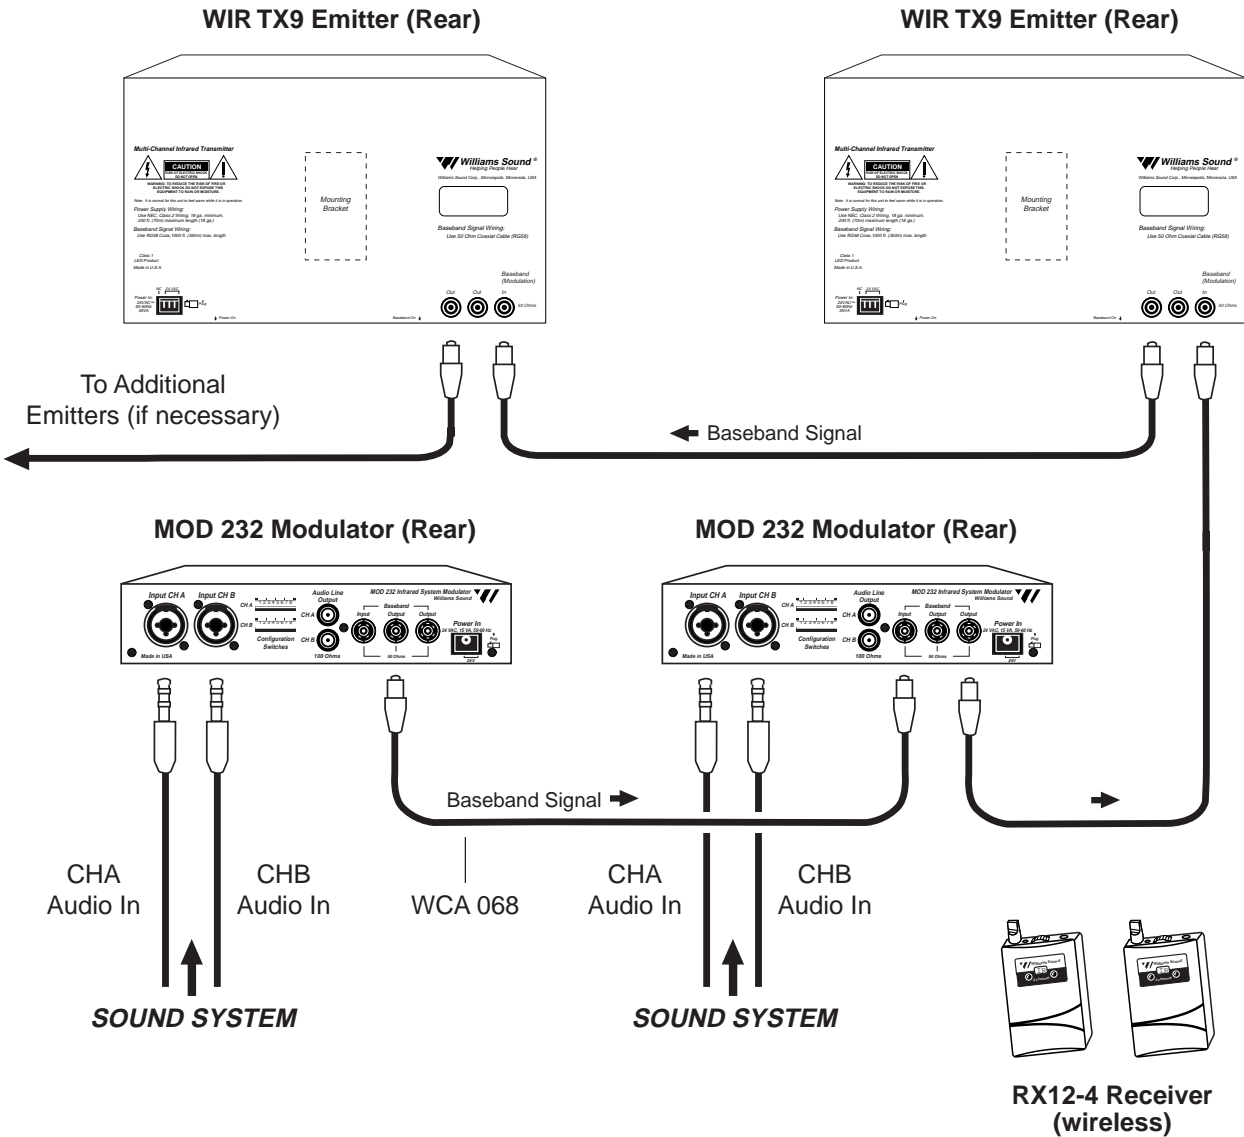

Bid Specs

Modulator, Model MOD 232

The infrared system shall consist of separate modulator and emitter units, with portable receivers. The modulator unit shall be a half-rack style, metal enclosure. A rack panel shall be available to mount one or two modulator units within a single EIA rack space. An adjustable floor stand and mounting bracket shall be available to mount the modulator and emitter together for portable operation.

The modulator shall provide two channels of selectable FM carrier signals; 2.3/2.8/3.3/3.8 MHz, so that a single modulator can be used to simultaneously transmit up to two channels, and two modulators can be ganged together to transmit up to four channels simultaneously. The carrier signals shall use 50 kHz deviation and 50 μ S pre-emphasis. The carrier signals (baseband) shall be transmitted to one or more emitters by 50 ohm RG58 coaxial cable with BNC-type connectors. A BNC-type baseband input jack and baseband output jack shall be provided on the modulator. The modulator shall be powered by an external 24 VAC, 10 VA, 50-60 Hz power supply, connected via a three-pin Molex power connector.

It shall have a rocker-type power switch, power LED indicator, four carrier indicator LEDs, and two bar graph-type LED audio indicators. The modulator shall have a modulated IR LED on the front panel for testing purposes, and a headphone jack that accommodates mono and stereo 1/4" headphones, and channel monitoring switch. The modulator shall have two rotary audio input level controls, and a screwdriver adjustable control for varying the input compression from 1:1 to 4:1. The modulator shall have two timers that automatically shut off the carriers when there is no audio signal present for 30 minutes. The modulator shall have two combination input jacks that accept 3-pin XLR plugs for balanced microphone input or 1/4" TRS plugs for balanced or unbalanced line-level inputs. The XLR inputs shall be low impedance, accept signal levels from 100 μ V to 90 mV, and supply 15 V simplex power per DIN45596. The TRS jacks shall accept balanced or unbalanced audio signal levels from 21 mV to 10 V. The modulator shall have CE, FCC, Industry Canada and AS approval and carry a five year parts and labor warranty.

The modulator shall be the Williams Sound Corp. Model MOD 232.

Emitter, Model TX9:

The emitter shall be contained in a metal enclosure with a shatter-resistant lens. The emitter shall include an omnidirectional mounting bracket for permanent installation and a bracket shall be available for mounting on a floor stand for portable installations. Each emitter shall be powered by a 24 VAC, 50 VA, 50-60 Hz power supply. The power connector shall be a 3-pin Molex-type. The emitter shall have a BNC-type 50 ohm baseband input and a BNC-type baseband 50 ohm output jack. The emitter shall have a repeater circuit to allow multiple numbers of emitters to operate from the baseband signal. The emitter shall have a visible LED indicator for power and for baseband signal. Carrier frequency is 50KHz to 8 MHz. The emitter shall shut off when the baseband signal is not present. The emitter shall provide an effective coverage area of 28,000 sq. ft. (2,600 sq. m.) in single channel mode and 18,000 sq. ft. (1,700 sq. m) in two channel mode when using the RX12-4 or RX16 receivers. The emitter shall be convection-cooled, without fans. The emitter shall have CE, FCC, Industry Canada and AS approval and carry a five-year warranty on parts and labor.

The emitter shall be Williams Sound Corp. Model WIR TX9.

Four Channel Receiver, Model RX12-4:

The receiver shall be a body-pack type with an IR detector lens on the face of the unit. The unit shall have a lanyard for hands-free operation. The receiver shall have a rotary-type volume control. The receiver shall operate for 60 hours with two AA alkaline batteries and for 30 hours per charge with NiMH AA batteries. The receiver shall be charged without battery removal via charger contacts in the case. A drop-in charger accessory shall recharge the batteries in 14 hours. The receiver shall be housed in an impact resistant plastic case with a hinged battery door that does not separate from the receiver. The receiver shall receive 2.3MHz, 2.8MHz, 3.3MHz or 3.8MHz modulated IR signals with 50 μ S de-emphasis. The receiver shall have a 3.5 mm stereo phone jack and accommodate low-impedance mono or stereo earphones, and headphones. The receiver shall accommodate neckloop telecoil couplers. The receivers shall provide 125 dB SSPL90 output with HED 002 headphone and 110 dB SSPL90 with EAR 013 earbud-type earphone.

The system electrical frequency response shall be 25 Hz to 16 kHz, +1, -3 dB and the signal to noise ratio shall be 60 dB. The receiver shall have CE, FCC, Industry Canada and AS approval. The receiver shall be covered by a five year parts and labor warranty, excluding earphones, headphones, batteries, and chargers.

The receiver shall be the Williams Sound Corp. Model WIR RX12-4.