

Multiple Battery Charger, Model CHG 1600


Description:

This multi-unit, drop-in style charger will conveniently charge up to 16 AA Williams Sound products overnight. It helps keep your products organized and saves cost on having to replace alkaline batteries.

CHG 1600 Multiple Battery Charger

Size:	17.75" W x 2" H x 12.25" D (45 cm W x 5 cm H x 31 cm D)	
Weight:	6.7 lbs (3 kg)	
Color:	Black with white legends	
Power Input:	3-pin Molex Input: 24 VAC, 35 VA	
Power Supply:	CHG 1600A: TFP 010 (120 VAC) CHG 1600B: TFP 027 (230 VAC)	
Charging Rate:	Overnight Charge: 80 mA Trickle/Maintain: 40 mA	
Charging Time:	15 hours nominal	
Compatible Receivers:	Compatible with most Williams Sound AA Receivers, including: PFM R31, PFM R32, PPA R19, PPA R30, R1-216, R1-173, WIR RX5, WIR RX6, WIR RX7, WIR RX8	
Compatible Transmitters:	Compatible with most Williams Sound AA Transmitters, including: PFM T30, PFM T31, T1-216, T1-173, T30	
Unit Capacity:	16 Units	
Controls:	Start Button	
Indicators:	Overnight Charge Timer:	Red LED
	Complete/Maintain:	Green LED
	Individual Charging Indicators:	Red LEDs

Multiple Battery Charger Features

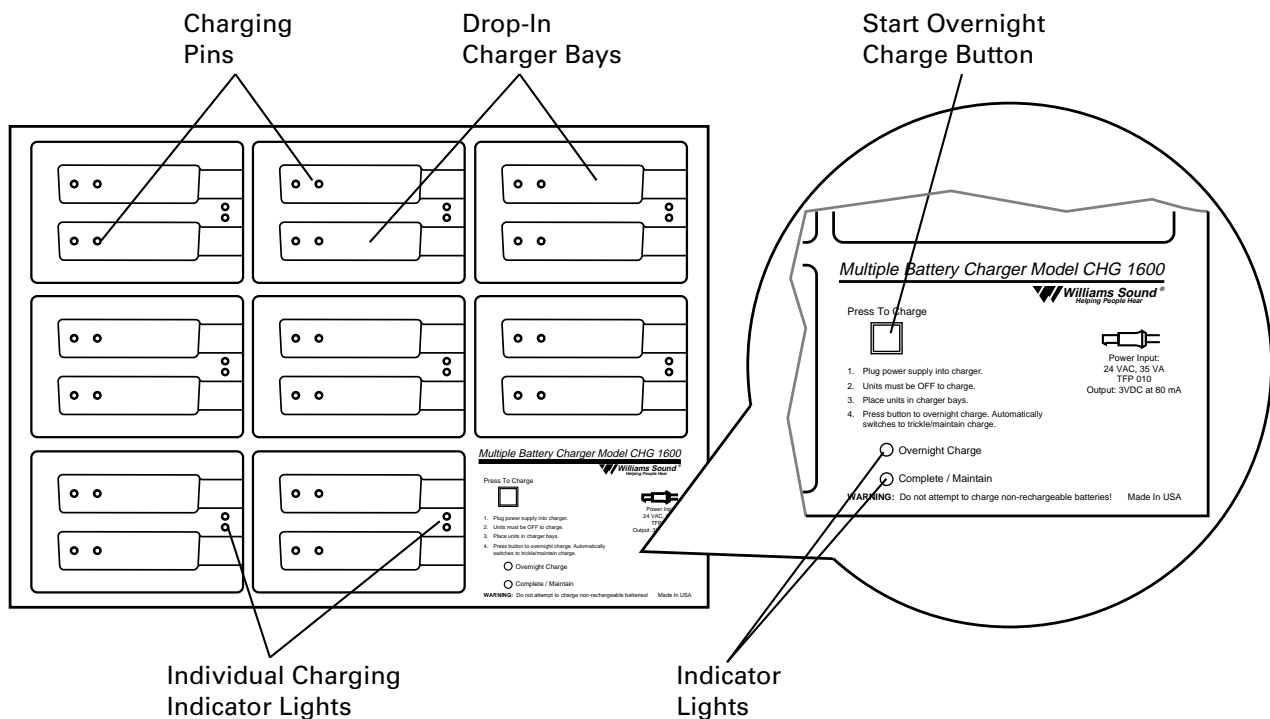

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

Multiple Battery Charger, Model CHG 1600

Bid Specs:

The CHG 1600 shall be a 16 unit drop-in battery charger and shall charge a maximum of 32 AA batteries while they are installed in most Williams Sound AA (3v) receivers or transmitters. The charger shall be 17.75" W x 2" H x 12.25" D (45 cm W x 5 cm H x 31 cm D) and weigh 6.7 lbs (3 kg). It shall have a push button start that will time the charge cycle to 15 hours. There shall be a red charge indicator showing overnight charge mode and a separate green indicator showing complete/maintain charge condition. Each charging bay shall have a red led charging indicator. It shall have a maintain (trickle) charge feature that will maintain the charge state of the batteries left on the charger. The charger CHG 1600A shall be powered by an external 120 VAC/24 VAC power supply and the CHG 1600B shall be powered by an external 230 VAC/24 VAC power supply via a 3 pin Molex, connector.

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

Multiple Battery Charger, Model CHG 1600

Contact:

United States and Mexico

Williams Sound Corp.
10321 W. 70th Street
Eden Prairie, MN 55344-3446
Ph: 800-328-6190 / 952-943-2252 / FAX: 952-943-2174
Web: www.williamssound.com
Email: info@williamssound.com

Canada

Thorvin Electronics
2861 Sherwood Heights Dr. Units 36-37
Oakville, ON L6J-7K1 Canada
Ph: 800-323-6634 / 905-829-3040 / FAX: 905-829-4196
Web: www.thorvinelectronics.com

South America

DPtech
SIA Trecho 3/4 Lote 335 2°. Andar
71200-030 Brasília, DF
BRAZIL
Ph: (5561) 361-1384
Fax: (5561) 361-0948
Web: www.dpotech.com.br
Email: ws@dpotech.com.br

Europe and Asia

Williams Sound Sales Office
Email: pauli@williamssound.com (or) doreenarmstrong@hotmail.com