


XTREME

PORTABLE SOUND SYSTEMS

With an optional built-in CD player and Anchor Wireless UHF, Anchor Audio's Xtreme Sound System expands its capabilities beyond any other system in the industry. This AC powered sound system delivers a powerful 123 dB that can reach crowds up to 2,500 people. With the convenience and extended mobility of a built-in CD player, the Xtreme is great for large indoor and outdoor events such as press conferences, sports venues, graduation ceremonies, musical productions or any other settings needing powerful and clear voice or music amplification.



**FEATURING
ANCHOR AUDIO WIRELESS UHF
AND BUILT-IN CD PLAYER OPTION**

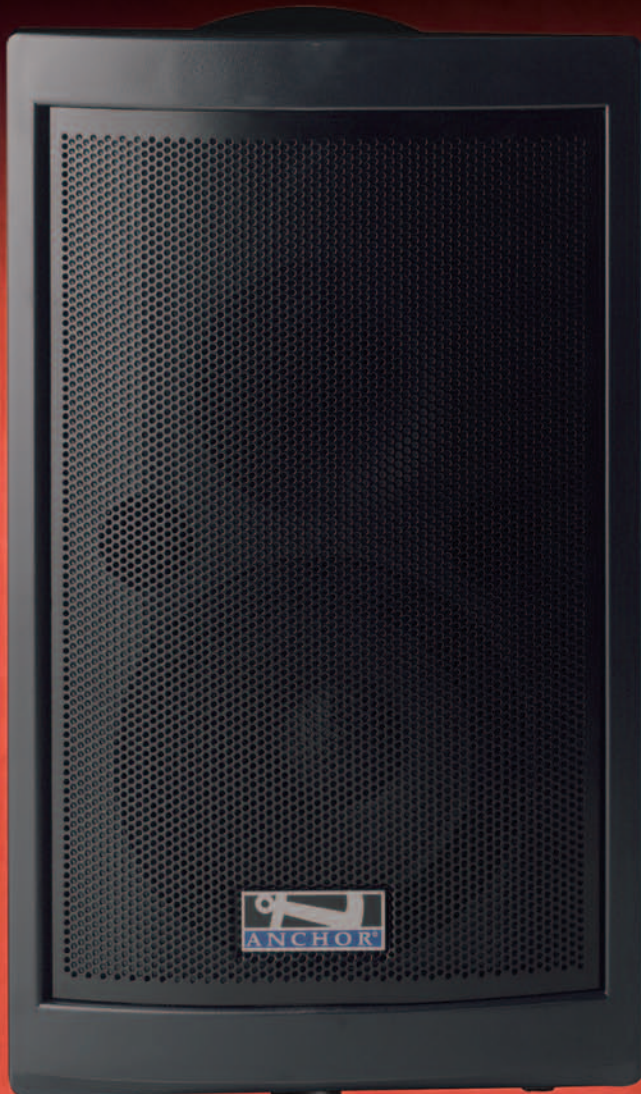

PORTABLE SOUND SYSTEMS



XTREME - BASIC PACKAGE

Xtreme w/Wireless Receiver and CD XTR-6000CU1
 Handheld Microphone WH-6000
 Speaker Stand SS-550



CROWDS UP TO
2,500 PEOPLE

**UHF Receiver -
16 User Selectable Channels**

XTREME - DELUXE PACKAGE


Xtreme w/Wireless Receiver and CD XTR-6000CU1
 Companion Speaker XTR-6001
 Handheld Microphone WH-6000
 Speaker Stands (2) SS-550
 100' Audio Cable SC-50NL



CROWDS UP TO
5,000 PEOPLE

SPEAKER STAND BAG

Holds 2 speaker stands & 1 mic stand
CC-550



TRANSPORTER

Hard Traveling Case
HC-1650LX



SLIP COVER

Nylon cover w/side pocket
NL-6000



SPECIFICATIONS:

XTR-6000

<i>Rated power output:</i>	<i>Stand-alone</i>	<i>w/XTR-6001 companion</i>
<i>low frequency amp:</i>	<i>90 watts</i>	<i>125 watts</i>
<i>high frequency amp:</i>	<i>40 watts</i>	<i>55 watts</i>
<i>Max SPL @ rated power:</i>	<i>116 dB music mode, 123 dB project mode</i>	
<i>Frequency response:</i>	<i>80 Hz - 15 kHz</i> <i>(project mode: +7 dB from 2-12 kHz)</i>	
<i>Bass/Treble control:</i>	<i>8 db cut/boost @ 100 Hz, 8 kHz</i>	
<i>Line input:</i>	<i>1/4" phone, Hi-Z, unbalanced</i>	
<i>Mic input:</i>	<i>XLR female, Lo-Z, 15 VDC phantom power</i>	
<i>Balanced input:</i>	<i>XLR female, switchable mic./line level</i> <i>15 VDC phantom power (switchable)</i>	
<i>Sensitivity for rated output:</i>		
<i>unbalanced line:</i>	<i>-18 dBV (125 mVrms)</i>	
<i>balanced mic:</i>	<i>-58 dBV (1.25 mVrms)</i>	
<i>balanced input:</i>		
<i>mic:</i>	<i>-58 dBV (1.25 mVrms)</i>	
<i>line:</i>	<i>-15 dBV (175 mVrms)</i>	
<i>Line output (post fader):</i>	<i>XLR male, 600Ω, active balanced</i>	
<i>Speaker Output:</i>	<i>4-pole Neutrik Speakon® jack for use with</i> <i>Anchor XTR-6001</i>	
<i>AC power requirements:</i>	<i>110 - 125 VAC, 50/60 Hz, 250 watts max.</i> <i>210 - 240 VAC, 50/60 Hz, 250 watts max.</i> <i>(250 watts maximum)</i>	
<i>AC accessory outlet:</i>	<i>110 - 125 VAC, 50/60 Hz, 500 watts max.</i> <i>210 - 240 VAC, 50/60 Hz, 500 watts max.</i> <i>(500 watts maximum)</i>	
<i>Dimensions (HWD):</i>	<i>22.5 x 13 x 10"; 57 x 33 x 26 cm</i>	
<i>Weight:</i>	<i>35 pounds, 16 Kg.</i>	

Specifications subject to change without notice.

MIC STAND



Microphone Stand
MSB-201

WIRED MICS



Wired Microphone
MIC-90

ANCHOR WIRELESS UHF MICS

Collar Mic
CM-60



Headband Mic
HBM-60



Lapel Mic
LM-60



Backpack
WB-6000



Handheld Mic
WH-6000



FOR MORE INFORMATION PLEASE CALL: 800.262.4671
3415 Lomita Blvd. • Torrance, CA • 90505 • www.anchoraudio.com

SIX YEAR WARRANTY



MADE IN THE USA