

Multiple Battery Charger, Model CHG 3512


Description:

This multi-unit, drop-in style charger will conveniently charge up to 12 Williams Sound Personal PA R35 or R38-8 receivers over the course of a four hour time span. It helps keep your products organized and saves cost on having to replace alkaline batteries.

CHG 3512 Multiple Battery Charger

| | | |
|---------------------|---|--------|
| Size: | 9.5" L x 7.4" W x 1.7" H (24.1 cm L x 18.8cm W x 4.3 cm H) | |
| Weight: | 1.2 lbs (.54 kg) - excluding power supply | |
| Color: | Black ABS | |
| Power Supply Input: | 90 - 240 VAC input | |
| Power Supply: | TFP 035 Switching AC adapter, 6 VDC - 5A output | |
| Charging Rate: | 4 Hour Charge: | 400 mA |
| | Trickle/Maintain: | 10 mA |
| Charging Time: | 4 hours nominal | |
| Unit Capacity: | 12 Units | |
| Indicators: | Individual Charging Indicators: Red LEDs. LEDs blink when batteries are charged | |
| Warranty: | 1 year (cables and power supply warranted for 90 days) | |
| Note: | Charging specifications are based on Williams Sound Corp. rechargeable NiMH battery, BAT 026 (1400 mAh) | |

Multiple Battery Charger Features

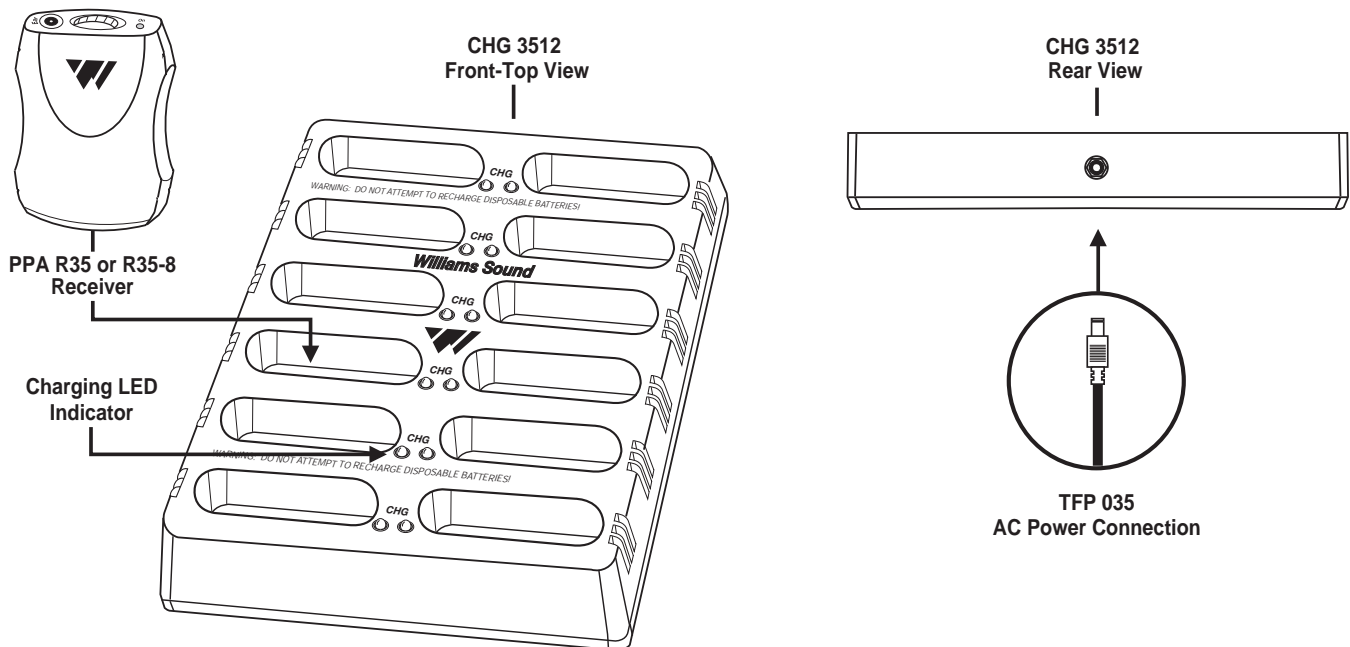

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

Multiple Battery Charger, Model CHG 3512

Bid Specs:

The CHG 3512 shall be a 12 unit drop-in battery charger and shall charge a maximum of 24 AA size NiMH batteries while they are installed into the Williams Sound Corp. PPA R35 or PPA R35-8 style 3V receivers.

The charger enclosure shall be ABS plastic measuring 9.5"L x 7.4"W x 1.7"H (24.1cm L x 18.8cm W x 4.3cm H) and weigh 1.2lbs (0.54kg) without power supply, 2.9lbs (1.3kg) shipping weight.

The charger shall be micro-processor controlled and have the ability to read the condition of the receiver batteries ascertaining whether to initiate full charge or trickle charge and maintain batteries to full potential.

Each bay on the charger shall have a red LED indicating charging status, LED be on constantly during charging and will blink indicating when batteries are fully charged.

The charger CHG 3512 shall be powered by an external switching power supply (90-240 VAC input; 6 VDC, 5A output) via a CD barrel connector.

The charger shall be the Williams Sound Corp. model CHG 3512.

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

Multiple Battery Charger, Model CHG 3512

Contact:

United States and Mexico

Williams Sound Corp.
10321 W. 70th Street
Eden Prairie, MN 55344
Ph: 800-328-6190 / 952-943-2252 / FAX: 952-943-2174
Web: www.williamssound.com
Email: info@williamssound.com

Canada

Thorvin Electronics
2861 Sherwood Heights Dr. Units 36-37
Oakville, ON L6J-7K1 Canada
Ph: 800-323-6634 / 905-829-3040 / FAX: 905-829-4196
Web: www.thorvinelectronics.com

South America

DPtech
SIA Trecho 3/4 Lote 335 2°. Andar
71200-030 Brasília, DF
BRAZIL
Ph: (5561) 361-1384
Fax: (5561) 361-0948
Web: www.dpotech.com.br
Email: ws@dpotech.com.br

Europe and Asia

Williams Sound Sales Office
Email: doreenarmstrong@hotmail.com