

Hearing Helper® FM Transmitter, Model T1-216

Description:


The PPA T1-216 is a narrowband, single-channel, body-pack style transmitter that operates on the 216 MHz bandwidth. The T1-216 will operate up to 100-300 feet and accommodate any number of users with additional receivers. The T1-216 features an impact-resistant case and a belt clip for hands-free operation. Each transmitter is frequency synthesized and crystal controlled for rock-solid tuning. Each transmitter features drop-in charging points, which allows up to 16 units to be charged at once in a single CHG 1600 multi-charger. The T1-216 is portable, requires no installation and is available with a variety of microphone options.

Applications:


- Group Tours • Destination Marketing Organizations • Cruise Ships • Tourism Offices
- University Tours • Large-Scale Guided Attractions • Museum & Presentation Centers
- Conferences Requiring Language Interpretation • Chambers of Commerce • Factory/Plant Tours

Specifications:

Dimensions:	3-5/8" L x 2-3/8" W x 7/8" H (92.1 mm x 60.3 mm x 22.2 mm)
Weight:	4.4 oz (125 g) with batteries
Color:	Neptune blue, shatter-resistant polypropylene
Battery Type:	Two (2) AA 1.5 V non-rechargeable Alkaline batteries (BAT 001), 120 mA nominal current drain, 8 hours approx. life (OR) two (2) AA 1.5 V NiMH rechargeable batteries (BAT 026), 120 mA nominal current drain, 6 hours per charge approx., recharges in 14–16 hours, uses CHG 1600 Multiple Battery Charger
Operating Frequencies:	216.325 MHz, standard (216.425, 216.625, 216.725 MHz optional)
Stability:	± .005%, crystal reference, PLL
Modulation:	Narrow-band FM, 10 kHz, 100 µS pre-emphasis
RF Output:	1.5 mW typical
Freq Response:	100 Hz to 10 kHz, ± 3 dB at 1% max. THD
Signal-to-Noise Ratio:	55-60 dB, with R1-216 Receiver
Compressor:	Compressor uses adjustable slope and noise gate
Transmit Antenna:	Integral with 39" microphone cord
Microphone:	Noise-cancelling, headset type, 39" cord, 3.5 mm mono phone plug (MIC 044)
Controls & Indicators:	On/Off switch, slide-type; "On" Indicator LED
Mic Connector:	3.5 mm mono phone jack
Charging Contacts:	Designed for use with CHG 1600 & CHG 200 Multiple Battery Chargers
Warranty:	5 years, parts and labor (90 days on accessories)



T1-216 Top

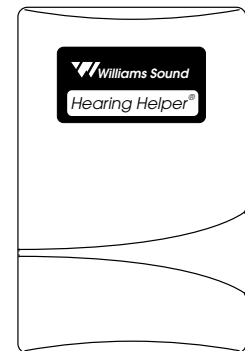

T1-216 Front

Bid Specs:

The PPA T1-216 is a narrowband body pack transmitter and shall operate on the 216 MHz frequency bandwidth. Frequency synthesized, crystal referenced, PLL. It shall be powered by two AA non-rechargeable alkaline batteries providing 8 hours operation and 6 hours per charge with two NiMH rechargeable batteries. It shall be housed in a Neptune-blue shatter-resistant polypropylene case with a hinged battery door that does not detach from the transmitter. It shall provide narrowband modulation at 10 KHz with 100 µS pre-emphasis and 1.5 mW RF output power. It shall have a 3.5 mm mono microphone jack and a slide type ON/OFF switch. It shall have drop-in charging points on the bottom of the unit. The transmitting antenna shall be integral with 40-inch microphone cord.

The transmitter shall be covered by a five-year parts and labor warranty (90 day for microphones and accessories). This transmitter shall be the Williams Sound Corp. model PPA T1-216.

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

Hearing Helper[®] FM Transmitter, Model T1-216

Contact:

United States and Mexico

Williams Sound Corp.
10321 W. 70th Street
Eden Prairie, MN 55344-3446
Ph: 800-328-6190 / 952-943-2252 / FAX: 952-943-2174
Web: www.williamssound.com
Email: info@williamssound.com

Canada

Thorvin Electronics
2861 Sherwood Heights Dr. Units 36-37
Oakville, ON L6J-7K1 Canada
Ph: 800-323-6634 / 905-829-3040 / FAX: 905-829-4196
Web: www.thorvinelectronics.com

South America

DPtech
SIA Trecho 3/4 Lote 335 2°. Andar
71200-030 Brasília, DF
BRAZIL
Ph: (5561) 361-1384
Fax: (5561) 361-0948
Web: www.dpotech.com.br
Email: ws@dpotech.com.br

Europe and Asia

Williams Sound Sales Office
Email: pauli@williamssound.com (or) doreenarmstrong@hotmail.com